


## SiCFS-0175-DO-T-599



### Specifications - SiCFS-0151-DO-T-520

Membrane material	Silicon Carbide
O-ring material	Viton/EPDM/NBR (NSF61)
Cap material	Glass fiber/PPS (NSF61)
Active membrane surface	0,1752 m <sup>2</sup>
Pore size	0,1 µm
pH range	1-14
Overall dimensions	L615xW150xT6/12mm
Maximum permeate flow	300 ltr/hour
Maximum suction pressure	-700 mbar
Maximum backwash pressure	2 bar
Operating temperature	5-80° C
Cleaning methods	Backwash/Ozone/High pressure jet/Chemical cleaning
Certifications	NSF61 drinking water approval

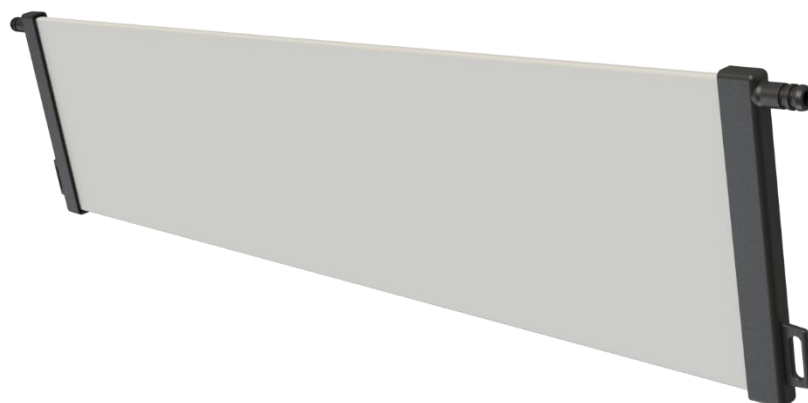